


SOLO XPRESS

The Almex SOLO Xpress press is the lightest rubber vulcanizer in the industry. This dependable, portable frame press is designed for a single user and uses little power. With an ergonomic and efficient design, the two-piece SOLO Xpress requires little time for assembly and disassembly. It can be carried to the splice location with ease.

■ FEATURES:

- Signature Almex Pressure Bag construction for uniform pressure
- Custom Extruded Plank cooling system within platens
- Innovative Silicone Element fast heating system
- Upper and lower rugged aluminum frames
- T-Series control panel in frame or external for managing temperature
- Side and end handles make transportation easy
- All electric control panels used with SOLO Xpress are CE, CSA and UL approved
- SOLO Xpress platens are a rhombic configuration
- SOLO Xpress presses can be aligned side-by-side for longer splices
- Each SOLO Xpress is custom built-to-order

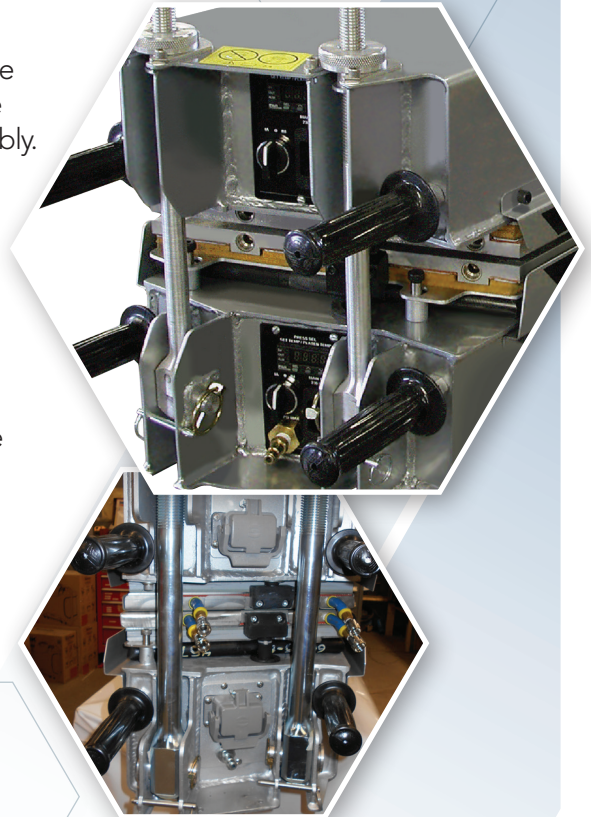

NA

Shaw Almex
Europe B.V.
☎ 31 646648648

Shaw Almex
Industries, Canada
☎ 1 905 643 7750

Shaw Almex
Industries, Canada
☎ 1 705 746 5884

Shaw Almex
Fusion, LLC. U.S.A.
☎ 1 404 292 8600

Shaw Almex
Africa (Pty) Ltd.
☎ 27 11 794 8262

 **ALMEX**
GROUP
www.almex.com 1.800.977.5423



COMPONENT	DESCRIPTION
PLATENS	- Utilizes innovative Almex flexible platen constructed from extruded plank, silicone heating element and durable composite insulation - Each platen contours to belt irregularities, ensuring uniform results. Maximum temperature 163 °C (325 °F) - Rhombic platens
FRAME	- Two light and rugged aluminum frames comprise upper and lower portions of press - Ends equipped with carrying handles on smaller models; sides are also equipped with handles on larger models.
CONTROL PANEL	Suitable Controls: - T1F: Inframe, maximum 30 amps total - T2: Remote, maximum 40 amps total for 230 Volt single phase operation - T6: Remote, maximum 30 amps total for three phase operation - T2 and T6 panels feature dual temperature control and indication systems - Optional timer available on T2 and T6 models.
PRESSURE/COOLING	- Almex inflatable pressure system, made from durable fabric-reinforced rubber ensures uniform pressure across splice surface - Presses available for 100 PSI maximum - Quick integral water cooling incorporated in platen design

NA

Shaw Almex
Europe B.V.
☎ 31 646648648

Shaw Almex
Industries, Canada
☎ 1 905 643 7750

Shaw Almex
Industries, Canada
☎ 1 705 746 5884

Shaw Almex
Fusion, LLC. U.S.A.
☎ 1 404 292 8600

Shaw Almex
Africa (Pty) Ltd.
☎ 27 11 794 8262


ALMEX
GROUP
www.almex.com 1.800.977.5423